


 Unique striped safety feature




- Stamped & rated to comply with Australian and International Standards
- Robust design and construction backed by decades of engineering to ensure the highest quality & safety standards
- Eyelet in bell housing allows locking by cable ties & complies with WHS requirements



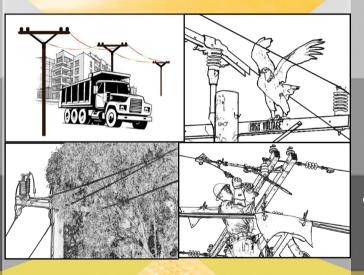



- LV & HV options available
- Rigid guards or flexible style hose cater for most requirements













Recommended Products





45B | 2m x 45mm male/female lengths PE, Yellow outer, Black inner safety feature ASTM F 712, Class 2 14.6KV*



DB35B | 2m x 35mm male/female lengths PE, Orange outer, Black inner safety feature ASTM F 712, Class 3 26KV*





*Both phases covered

Other length options available on request






Recommended Products









DB35ARB | 2.5m x 35mm



DB35ARB125 | 1.25m x 35mm



DB45A | 2.5m x 45mm





AS 4202 650V ASTM F712 14.6KV





Recommended Products











■ 1. TPP15 | 60m x 15mm roll | EVA Black outer, Yellow inner safety feature | Electrically tested to ASTM F 712 Class 2 14.6KV*

2. TPP20 | 3m x 20mm male / female lengths | HDPE, Black Outer, Yellow inner safety feature | ASTM F 712 Class 2 14.6KV*
3. TPP35 | 3m x 35mm male / female lengths | HDPE, Black Outer, Yellow inner safety feature | ASTM F 712 Class 2 14.6KV*

*Both phases covered





GG 2m x 45mm | HDPE

For Stay & Guy Wires (not rated for electrical insulation)



Jumper Wire Guards

IPEP | 10m x 35mm | EVA



Flexible hose for covering Bonds, Bridges & Jumper Wires



