

Sections





ROTAMARKA



WARNING MARKERS



Marine grade components



Reduced line loading by design



Thermally tested



• UV Resistant



 Soft jaw protects cable and prevents creeping.
 Fits all lines from 2-50mm diameter









 Dielectric strength tested



Snow and ice tested



Ozone tested



 Wind tunnel tested



 Aerodynamic 3D design, rotates for high impact visibility from all angles of approach



Installation Options

ROTAMARKA





Recommended Products

Choose Eye Ring or Bayonet

WARNING MARKERS



Warning Marker Drive Tool

WMDT | ~42 x 22m SS (works with Eve or Bayonet)



ROTAMARKA Install/uninstall tool - universal - Eve

LLCR-E | ~300 x 55

with Shotgun Stick (Eye version)




Can be installed from Bucket Truck



Can be installed from ground with Telescopic Stick and LLCR-E Tool (Eye version)





This is a guide only, consult our Instructions For Use for further details. Perform a risk assessment prior to undertaking any work. Only to be used by industry certified personnel. Must comply with all relevant work practice rules and industry quidelines.

*4Nm recommended tightening torque

**Image representative only



WARNING MARKERS ROTAMARKA





Recommended Products

Warning Marker - Part Number Legend

Example :: WM-CS-B-1A-RW

A B C D E

- A Product type: WM (Warning Marker)
- **B** Line attachment: CS (Clam Shell)
- C Hot Stick Attachment: B/E (Bayonet or Eye Ring)
- D Style of warning device: 1A/1B/1C/1D/1E (Bushing/Flag/Bearing/Unit Jt/Mini)
- E Colour: RW/O/BY/BW (Red/White, Orange, Black/Yellow, Black/White)

Standard Size

WM-CS-B-1A-RW WM-CS-E-1A-RW WM-CS-E-1C-RW WM-CS-B-1A-BW WM-CS-E-1A-BW WM-CS-E-1C-BW WM-CS-B-1A-BY WM-CS-E-1A-BY WM-CS-E-1C-BY Bayonet, Bushing Eye Ring, Bushing Eye Ring, Bearing

Mini Size

WM-CS-E-1E-RW | Eye Ring, Bearing WM-CS-E-1E-BW | Eye Ring, Bearing WM-CS-E-1E-BY | Eye Ring, Bearing









ROTAMARKA



WARNING MARKERS

Universal Joint | Eye Ring | Bearing

WM-CS-E-1D-RW

WM-CS-E-1D-BW

WM-CS-E-1D-BY



WM-CS-B-1B-O | Bayonet WM-CS-E-1B-O | Eye-Ring



Ideal for installation on guy or stay wires

See also
Guy Guards
Refer Section 2 - Page 5

See also
Pole Markers
Refer Section 7 - Page 1



• Unique striped safety feature



- Stamped & rated to comply with Australian and International Standards
- Robust design and construction backed by decades of engineering to ensure the highest quality & safety standards
- ties & complies with WHS



 Eyelet in bell housing allows locking by cable requirements







Weather resistant



- LV & HV options available
- Rigid quards or flexible style hose cater for most requirements
- Suitable for use on Power Lines & Wires as visual warning, mechanical protection and electrical insulation



Recommended Products

Lion Tails



DB45B | 2m x 45mm male/female lengths PE, Yellow outer, Black inner safety feature ASTM F 712, Class 2 15KV*



DB35B | 2m x 35mm male/female lengths
PE, Orange outer, Black inner safety feature
ASTM F 712, Class 3 26KV*



*Both phases covered





E GUARDS

Tiger Tails® Class I - 650V AS4202 - HDPE



DB35A 2.5m x 35mm



DB35ARB | 2.5m x 35mm



DB35ARB125 | 1.25m x 35mm



DB45A | 2.5m x 45mm





Recommended Products







Panther Tails



Unique 2 tone design

TPP15-Kit Installation tool kit for TPP15 Rolls


TPP15 | 60m x 15mm roll | EVA Black outer, Yellow inner safety feature | Electrically tested to ASTM F 712 Class 2 15KV*

- 1. TPP20 | 3m x 20mm male / female lengths | HDPE, Black Outer, Yellow inner safety feature | ASTM F 712 Class 2 15KV*
- 2. TPP35 | 3m x 35mm male / female lengths | HDPE, Black Outer, Yellow inner safety feature | ASTM F 712 Class 2 15KV*




*Both phases covered

Wildlife protection



Tree protection



Personal protection





Guy Guards

GG 2m x 45mm HDPE

For Stay & Guy Wires (not rated for electrical insulation)



Jumper Wire Guards

IPEP | 10m x 35mm | EVA | AS4202 Class 1 | 650V



Flexible hose for covering Bonds, Bridges & Jumper Wires





 Pure Latex Gloves manufactured under ISO 9001 ISO 14001





- Certified to EN/IEC 60903 also available in ASTM D120
- Ergonomically shaped excellent strength & durability
- Supreme feel & flexibilty
- Outer Protector Gloves custom designed to perfectly complement the Marigold Rubber Insulating Glove



- Manufactured without the use of solvents & hazardous chemicals utilising a proprietary aqueous dipping process
- Acid resistant
- Ozone resistant
- Low temperature resistant
- Comprehensive range of classes, colours, lengths and sizes, including half sizes
- Various cuff styles available including straight, contour and bell
- Arc flash certified



Use the Chart below to determine the appropriate level of protection for your application

Labeling Chart Marigold [®] Natural Rubber Electrical Protection Equipment				
Class Colour	Proof Test Voltage AC/DC	Max. Use Voltage AC/DC	Insulating Rubber Glove Label	
00 Beige	2,500 / 10,000	500 / 750	MARIGOLD INDUSTRIAL ANSI/ASTM D120 EN60903 TYPE 1 10 CLASS 00	
0 Red	5,000 / 20,000	1,000 / 1,500	MARIGOLD INDUSTRIAL ANSI/ASTM D120 EN60903 TYPE 1 10 CLASS 0	
1 White	10,000 / 40,000	7,500 / 11,250	MARIGOLD INDUSTRIAL ANSI / ASTM D120 EN60903 TYPE 1 10 CLASS 1	
2 Yellow	20,000 / 50,000	17,000 / 25,500	MARIGOLD INDUSTRIAL ANSI / ASTM D120 EN60903 TYPE 1 10 CLASS 2	
3 Green	30,000 / 60,000	26,500 / 39,750	MARIGOLD INDUSTRIAL ANSI / ASTM D120 EN60903 TYPE 1 10 CLASS 3	
4 Orange	40,000 / 70,000	36,000 / 54,000	MARIGOLD INDUSTRIAL ANSI / ASTM D120 EN60903 TYPE 1 10 CLASS 4	

LV HV Testing Services Available

Outer Protector Gloves should always be worn over Rubber Insulating Gloves to prevent mechanical damage to the rubber gloves. The Outer Protector must be properly sized and shaped to avoid the deformation or damage of the Rubber Insulating Glove. The minimum distance between the cuff of the Rubber Insulating Glove and the cuff of the Outer Protector Glove is listed in the table below "Clearance for Outer Protectors".

Clearance Table for Outer Protectors

Glove Class	Min. Distance Between Outer Protectors & Rubber Insulating Gloves inches mm		
00, 0	1/2	13	
1	1	25	
2	2	51	
3	3	76	
4	4	102	





LV HV Testing Services Available



Glove Length 280 mm (11 inch) 360 mm (14 inch) 400 mm (16 inch) 460 mm (18 inch)

Glove Size	Nominal Hand C	ircumference
7	7 inches	
8	8 inches	203 mm
81/2	8½ inches	216 mm
9	9 inches	229 mm
91/2	9½ inches	241 mm
10	10 inches	254 mm
10½	10½ inches	267 mm
11	11 inches	279 mm

Tolerance = +/- 13 mm

* Allow an extra half inch if cotton inners are to be used

Rubber Insulating Glove Item Number Legend



Example:: RIG-4-18-YB-C-10H

ABCDEF

A - Glove type: RIG (Rubber Insulating Glove)

B - Class: 00/0/1/2/3/4

C - Length: 11/14/16/18 (inches)

D - Colour: R/Y/YB/BY (Red, Yellow, Yellow under Black, Black under Yellow)

E - Cuff: S/C/B (Straight/Contour/Bell)

F - Size: 7/8/8H/9/9H/10/10H/11 (H = $\frac{1}{2}$ sizes)



How to measure

Measure around your hand above the V of the thumb. This gives you the circumference in inches.

balmoralengineering.com.au

info@balmoralengineering.com.au



LV HV Testing Services Available

GLOVES & SLEEVES

Rubber Insulating Sleeve Item Number Legend

Example :: RIS-4-RY-EC-Regular

A B C D E



A - Sleeve type: RIS (Rubber Insulating Sleeve)

B - Class: 2/3/4

C - Colour: RY (Red under Yellow)

D - Arm: EC/S (Extra Curve/Straight)

E - **Size**: S/R/L/EL (Small/Regular/Large/Extra Large)



Class 2 - Dielectric Boots





Class 00 - 500V Straight Cuff 11 inch

LV HV Testing Services Available

RIG0011RS7 | Size 7 RIG0011RS8 | Size 8 RIG0011RS8H | Size 8½ RIG0011RS9 | Size 9 RIG0011RS9H | Size 9½ RIG0011RS10 | Size 10 RIG0011RS10H | Size 10½ RIG0011RS11 | Size 11



AVAILABLE ON REQUEST



Class 00 - 500V Straight Cuff 14 inch

RIG0014YS7 | Size 7* RIG0014YS8 | Size 8* RIG0014YS9 | Size 9* RIG0014YS10 | Size 10* RIG0014Y11 | Size 11*



Class 0 - 1000V Straight Cuff 14 inch

RIG014YS7 | Size 7 RIG014YS8 | Size 8 RIG014YS8H | Size 8½ RIG014YS9 | Size 9 RIG014YS9H | Size 9½ RIG014YS10 | Size 10 RIG014YS10H | Size 10½ RIG014YS11 | Size 11



Class 0 - 1000V Straight Cuff 11 inch

RIG011YS8 | Size 8*
RIG011YS8H | Size 8½**
RIG011YS9 | Size 9½**
RIG011YS9H | Size 9½**
RIG011YS10 | Size 10*
RIG011YS10H | Size 10½**
RIG011YS10H | Size 11*





Class I - 5KV Straight Cuff 14 inch

RIG114YBS8 | Size 8*
RIG114YBS8H | Size 8½*
RIG114YBS9 | Size 9½
RIG114YBS9H | Size 9½
RIG114YBS10 | Size 10½
RIG114YBS10H | Size 10½
RIG114YBS11 | Size 11*



LV HV Testing Services Available



Class 2 - 17KV Bell Cuff 16 inch

RIG216YBB8 | Size 8*
RIG216YBB8H | Size 8½*
RIG216YBB9 | Size 9
RIG216YBB9H | Size 9½
RIG216YBB10 | Size 10
RIG216YBB10H | Size 10½
RIG216YBB10H | Size 10½
RIG216YBB11 | Size 11*



Class 2 - 17KV Straight Cuff 16 inch

RIG216YBS8 | Size 8
RIG216YBS8H | Size 8½
RIG216YBS9 | Size 9
RIG216YBS9H | Size 9½
RIG216YBS10 | Size 10
RIG216YBS10H | Size 10½
RIG216YBS11H | Size 11½



Class 2 - 17KV Contour Cuff 18 inch

18 inch
RIG218YBC8 | Size 8*
RIG218YBC8H | Size 8½*
RIG218YBC9 | Size 9
RIG218YBC9H | Size 9½
RIG218YBC10 | Size 10
RIG218YBC10H | Size 10½
RIG218YBC11 | Size 11*



Class 3 - 26.5KV Bell Cuff 16 inch

RIG316YBB8 | Size 8*
RIG316YBB8H | Size 8½*
RIG316YBB9H | Size 9½
RIG316YBB9H | Size 9½
RIG316YBB10 | Size 10
RIG316YBB10H | Size 10½
RIG316YBB10H | Size 10½
RIG316YBB11 | Size 11*



Class 3 - 26.5KV Straight Cuff 16 inch

RIG316YBS8 | Size 8 RIG316YBS8H | Size 8½ RIG316YBS9 | Size 9 RIG316YBS9H | Size 9½ RIG316YBS10 | Size 10 RIG316YBS10H | Size 10½ RIG316YBS10H | Size 10½





Class 3 - 26.5KV Contour Cuff 18 inch

RIG318YBC8 | Size 8*
RIG318YBC9H | Size 8½*
RIG318YBC9H | Size 9½
RIG318YBC10H | Size 10½
RIG318YBC10H | Size 10½
RIG318YBC11H | Size 11*





LV HV Testing Services Available



Class 4 - 36KV Bell Cuff 18 inch

RIG418YBB9 | Size 9 | RIG418YBB9H | Size 9 | Size 10 | Size 11 | S



Class 4 - 36KV Straight Cuff 18 inch

RIG418YBS9 | Size 9 RIG418YBS9H | Size 9½ RIG418YBS10 | Size 10 RIG418YBS10H | Size 10½ RIG418YBS11 | Size 11



Class 4 - 36KV Contour Cuff 18 inch

RIG418YBC9 | Size 9 RIG418YBC9H | Size 9½ RIG418YBC10 | Size 10 RIG418YBC10H | Size 10½ RIG418YBC11 | Size 11*



Class 2 - 17KV Extra Curved

RIS2RYECS | Small RIS2RYECR | Regular RIS2RYECL | Large



Class 3 - 26.5KV Extra Curved

RIS3RYECS | Small RIS3RYECR | Regular RIS3RYECL | Large



Class 4 - 36KV Extra Curved

RIS4RYECS | Small RIS4RYECR | Regular RIS4RYECL | Large



Also available in selected sizes





LV Outer Protector 10 inch - Goatskin Velcro Cotton Strap Kevlar Thread

OUTLVGS7 | Size 7

OUTLVGS8 | Size 8-8½

OUTLVGS9 | Size 9-9½

OUTLVGS10 | Size 10-10½

OUTLVGS11 | Size 11

Note: Choose same size as Marigold Class 00 and 0 gloves or best fit for comfort



LV HV Testing Services Available



HV Outer Protector 12 inch - Goatskin

OUTHVGS8 | Size 8-8½
OUTHVGS9 | Size 9-9½
OUTHVGS10 | Size 10-10½
OUTHVGS11 | Size 11

Note: Choose same size as Marigold Class 1, 2, 3 & 4 gloves or best fit for comfort



Powerflex, Neo Coat LVL4 Flame, LVL5 Cut EN

PFLEX-8 | Size 8 PFLEX-9 | Size 9 PFLEX-10 | Size 10 PFLEX-11 | Size 11

Note: Choose one size up if using over Marigold Class 00 and 0 Gloves or best fit for comfort

Inner Liners One Size Fits All

COT1 | Cotton - Interlock | 10" COT2 | PolyCotton - Knitted | 10" COT3 | Cotton - Interlock | 14"



Glove Talc

GLO-TALC | 100g



Glove Air Test Tool

GLO-ROL1 | 360 x 40 | HV GLO-ROL2 | 300 x 25 | LV




Sleeve Accessories

B2 | Sleeve Buttons (1pc)

B22 | Sleeve Buttons (2pc - 4 pack)

H1 | Harness C/W 4 B2 Buttons

S1 | Straps (2) C/W 4 B2 Buttons





LV HV Testing Services Available

GLOVES & SLEEVES

LV Glove Bag 2 Pocket Treated Canvas Velcro Close - Webbing Loops Solid Walls

LY GLOVES ONLY

Hard Base Breathable

front

26012 390x210x45



LV Glove Bag 1 Pocket Loomstate Canvas Velcro Close - Webbing Loop LV Glove Bag 2 Pocket Loomstate Canvas **Velcro Close - Webbing Loop**



Slimline front pocket suitable for leather storage

LV Glove Bag 3 Pocket Loomstate Canvas **Velcro Close - Webbing Loop**



Slimline front pocket suitable for leather storage

LV Glove Bag 3 Pocket Treated Canvas Velcro Close - Plastic Snap Hook



HV Glove Bag 2 Pocket Loomstate Canvas Velcro Close - Metal Snap Hook



HV Glove & Sleeve Bag 3 Pocket Loomstate Canvas Velcro Close - Metal Snap Hook



info@balmoralengineering.com.au

+61 2 9482 4000

balmoralengineering.com.au

MATS & COVERS

- EPDM Rubber or PVC material options
- Dual colour material safety options available

 Non-slip & flexible Ground Mats

Weather resistant





Crease in Class I
 PVC style covers
 to conform to line







Velcro

tud

- Stamped & rated to comply with Australian and International Standards
- Meets ENA & electrical safety rules and guidelines in most States and Territories

balmoralengineering.com.au

info@balmoralengineering.com.au

into firehose when possible





LV HV Testing Services Available



Recommended Products

Ground Mats EPDM

MATS & COVERS

- 1. | 181A-1 | 1mx1mx6mm | Class A | 650V | Cut-out | 181A-2 | 1.2mx1mx6mm | Class A | 650V | Plain
- **3.** | 181A-3 | 1.5mx1mx6mm | Class A | 650V | Slots | 181A-4 | 900x900x6mm | Class A | 650V | Plain

Equipotential Mats

• | 181EP-1 | 770x770mm | C/W Bag









Ground Mats 1mx1mx6mm EPDM 1810* | Class 0 | 1000V 1811* | Class 1 | 5KV 1812* | Class 2 | 17KV 1813* | Class 3 | 26.5KV 1814* | Class 4 | 36KV * AS2978 * IEC61111



- 181A-ROLL* | Class A | 650V 1810-ROLL* | Class 0 | 1000V
- 1811-ROLL* | Class 1 | 5KV 1812-ROLL* | Class 2 | 17KV
- 1813-ROLL* | Class 3 | 26.5KV
- 1814-ROLL* | Class 4 | 36kV

AS2978 Minimum 900mm cut size

* IEC61111 Minimum 600mm cut size

balmoralengineering.com.au

info@balmoralengineering.com.au



MATS & COVERS

Line Covers 650V PVC Magnet/Press Studs AS4202

2003 | 1.2mx225mm drop 3003 | 1.2mx300mm drop 4004 | 1.2mx375mm drop 5002 | 1.5mx225mm drop



LV HV Testing Services Available



Recommended Products

Line Covers 650V PVC Studs AS4202

2001 | 1.2mx225mm drop 3001 | 1.2mx300mm drop 4001 | 1.2mx375mm drop 5001 | 1.5mx225mm drop 6001 | 1.8mx225mm drop

Line Covers 650V EPDM Velcro AS4202

2004 | 1.2mx225mm drop 2006 | 600x225mm drop 2010 | 1mx235mm drop 3002 | 1.2mx300mm drop

3002 | 1.2mx300mn

Cross Arm Covers 650V AS4202

7001 | 1.2mx375mm drop | PVC Studs 7004 | 1.2mx225mm drop | EPDM Velcro 7008 | 1.2mx225mm drop | PVC Mag/PStuds 7010 | 1mx235mm drop | EPDM Velcro



Comms Cable Covers 650V

AS4202 7002 | 1.2mx225mm | EPDM Velcro 8002 | 600x225mm | PVC Studs

8006 | 600x225mm | PVC Mag/PStud


Fuse Link Covers 650V AS4202 8001 | 60


8001 | 600x375mm drop | PVC Studs 8007 | 850x850mm | PVC Plain

8010 | 850x700mm | EPDM Velcro

8016 | 400x400mm drop | PVC Studs

8020 | 600x375mm drop | PVC Mag







LV HV Testing Services Available



Recommended Products

Substation & Switchboard Kits

MATS & COVERS



Clear or Yellow Drapes Available

Available Fasteners: (Magnetic, Eyelet, Clamps) 16002 | (9008) (9007) (9019) (181A) (25006) (26031) (YS-211-3-5)
2 x small plain Drapes, 2 x medium plain Drapes, 1 x large plain Drape,
1 x Ground Mat. 1 x Velcro Strap. 1 x Bag. 4 x Clamps

16003 (10005) (10006) (181A) (25006) (26031)

4 x small magnetic Drapes, 2 x large magnetic Drapes, 1 x Ground Mat, 1 x Velcro Strap, 1 x Bag

16004 (10005) (10021) (26031) (YS-211-3-5)

4 x small magnetic Drapes, 2 x large magnetic Drapes, 1 x Bag, 4 x Clamps

16005 (10005) (10006) (26031)

4 x small magnetic Drapes, 2 x large magnetic Drapes, 1 x Bag

16006 (10029) (10030) (181A) (25006) (26031)

4 x small magnetic Drapes, 2 x large magnetic Drapes, 1 x Ground Mat,

1 x Velcro Strap, 1 x Bag

16007 (10031) (10032) (26031) (YS-211-3-5)

2 x small clear magnetic Drapes, 2 x large clear magnetic Drapes,

4 x Clamps, 1 x Bag

Custom kits available upon application, MOQ's apply

Street Light Column Kits



14001 | (23002) (INS-S) (INS-L) (26004)

1 x magnetic Column Cover (pair), 2 x small Inserts, 2 x large Inserts, 1 x Bag

14002 (23002) (INS-S) (INS-L) (181A) (25006) (26031)

1 x magnetic Column Cover (pair), 2 x small Inserts, 2 x large inserts,

1 x Ground Mat, 1 x Velcro Strap, 1 x Bag

14003 (23002) (INS-S) (26004)

1 x magnetic Column Cover (pair), 2 x small Inserts, 1 x Bag

Custom kits available upon application, MOQ's apply







LV HV Testing Services Available

Recommended Products

Substation & Switchboard Drapes EPDM 650V

MATS & COVERS




Substation & Switchboard Drapes PVC 650V



8008	850x850mm magnetic
9007	600x450mm plain
9008	400x300mm plain
9019	1.2mx900mm plain
10005	600x450mm eyelets/mag
10006	1.2mx600mm eyelets/mag
10020	900x900mm eyelets
10021	2mx600mm magnetic

Substation & Switchboard Drapes 650V Cut-to-length



Cable End Covers PVC 650V





MATS & COVERS

Bags PVC - Zipper

1. | 26014 | Line Cover Bag | 1.4mx400x100mm

2. | 26015 | Ground Mat Bag | 1.1mx150x100mm








Clamp Polypropylene



Straps Velcro 25005 | 500x50mm 25006 | 1mx50mm



Studs

1.

- 1. | 24003 | Magnet
- 2. PB4 | Standard Stud
- 3. | PB5-A | Male Press Stud
- 4. | PB5-B | Female Press Stud



3.



balmoralengineering.com.au

info@balmoralengineering.com.au



RESCUE KITS

- Pole Top Kits and components
- Low Voltage Switchboard Rescue Kits and components
- Latest comfort style Linesman Safety Harnesses/Belts, leading brands
- Customised kits and accessories to meet local and national industry standards



 Quality manufacturers and brands

Easy adjusting Pole Straps

- Friction descenders and lowering devices
- Rescue Bags & Boxes
 Pouches
 Knives
 Gloves
 Cutters
 Crooks

balmoralengineering.com.au

info@balmoralengineering.com.au



RESCUE KITS

Pole Top Rescue Kit (NSW - ASP - C/W Bag)

11006 1x Bag, 1x CPR card, 1x Anchor Strap 1x Body Belt & Pole Strap, 1x Knife, 1x Rope, 1x Rubber Gloves



Pole Top Rescue Kit (NSW - ASP - C/W Box)

11019 | 1x Box, 1x CPR card, 1x Body Belt & Pole Strap, 1x Knife, 1x Rope, 1x Rubber Gloves, 1x Anchor Strap



Pole Top Rescue Kit (NSW - CSP)

11020 | 1x Bag, 1x CPR card, 1x Twin Pole Strap, 1x Knife, 1x Rope, 1x Rubber Gloves, 1x Anchor Strap



Pole Top Rescue Kit (QLD)

11007 | 1x Bag, 1x CPR card, 1x Body Belt, 1x Knife, 1x Parrot Beak Cutters, 1x Pole strap, 1x Rope, 1x Tool Pouch, 1x Rubber Gloves



balmoralengineering.com.au

Pole Top Rescue Kit (VIC & TAS)

11003 | 1x Bag, 1x CPR card, 1x Anchor Strap, 1x Body Belt and Pole Strap, 1x Pliers, 1x Rope, 1x Parrot Beak Cutters, 1x Riggers Gloves, 1x Webbing Cutter



Pole Top Rescue Kit (WA)

11009 | 1x Bag, 1x CPR card, 1x Safety Knife, 1x Parrot Beak Cutter. 1x Pole Strap, 1x Rope, 1x Snap Hook, 1x Crook Optional item:

Half Harness (BB-HAR)



info@balmoralengineering.com.au



RESCUE KITS



Recommended Products

LV Switchboard Rescue Kit 11002 | 1x Bag, 1x CPR Card, 1x Crook, 1x Torch, 1x Isolate Here Sign, 1x Trauma Dressing,



PPE Equipment Bags

26036 | 780 x 286 x 360 Canvas (heavy duty) 26040 | 550 x 300 x 300 Canvas (medium duty)

Rope Bags

26034 640 x 280 PVC

Rescue Descender Devices

ANC-ST-2 1.8m







LV Crooks

GAN-CRK 370 x 25 HDPE

balmoralengineering.com.au

info@balmoralengineering.com.au



TOOLS & EQUIPMENT

• Premium Leather Tool Pouches

- RipStop Canvas Tool Buckets
- Bags constructed using heavy duty fasteners & fittings





Rubber Goods Cleaner

• Excellent cleaning power

Harmless on rubber

• Non corrosive & non toxic

- Multiple packaging options
- No mixing required



TOOLS & EQUIPMENT

Test Meter Bags

26038 | 360x280x240 PVC Velcro 26010 | 300x90x150 PVC Velcro 26026 | 200x120x240 PVC Velcro



Tool Bags

26018 | 350x150x250 | 15 Internal Pockets 26022 | 380x290 | 2 External Pockets 26028 | 9 Pocket | Webbing Belt



Rubber Goods Cleaner

RBG-D72 | 72 wipes RBG-35LR | 1 Quart Spray

Approved for use on Mats & Covers, Gloves & Sleeves







POLE MARKERS & CAPS



Recommended Products

Pole Markers

*Special Order Only

- Designed to last 15 years +
- Excellent UV resistance
- Increases visibility of poles for both day and night conditions
- Textured surface to reduce adhesion of unwanted signs and labels
- Easy to install, Tek Screws or Band-It Strapping can be used.

Item No.	Size	Base Material	Base Colour	Reflector Quantity	Reflector Colour
PM6060GW	600x600mm	Polyethylene	Grey	6	White
PM6060GY	600x600mm	Polyethylene	Grey	6	Yellow
PM7060BY	700x600mm	Polyethylene	Black	8	Yellow
PM6030GW	600x300mm	Polyethylene	Grey	6	White
PM5030BY	500x300mm	Polyethylene	Black	6	Yellow














POLE MARKERS & CAPS



Pole Caps

- Designed to last 30 years +
- Excellent UV resistance
- Natural insulating properties
- Flexible/pliable material can bend and stretch to uneven pole sizes and shapes
- A range of sizes and shapes available
- Easy to install, Tek screws can be used

Item No.	Size	Base Material	Base Colour	Comments
PC130B	130x45mm	LDPE	Black	
PC150G	150x45mm	LDPE	Grey	
PC200B	200x100mm	LDPE	Black	
PC200G	200x100mm	LDPE	Grey	Comes with Bird Diverter
PC216Y	216x170mm	LDPE	Yellow	Comes with Velcro strap and is rated electrically





Custom sizes available subject to MOQ



WILDLIFE PROTECTION

- Designed to cover over Crossarm mounted Insulators to help protect Birds and Critters from bridging between phases.
- Each unit should be installed on each Insulator/Phase on the Crossarm.
- Electrical faults induced by Birds and Critters can be deadly to the animals and potentially cause expensive outages.
- Two types, offset and centre depending on Insulator configuration.
- Excellent weathering resistance, time tested product.
- Easily snap clips together to form a sturdy installation

WPC-01

Wildlife Protection Cover, 450x133, Black, Offset




WPC-C1

Wildlife Protection Cover, 450x130, Black, Centre



Electrically Tested to 25KV

Wildlife protection



Can be used with Panther Tails to extend barrier


WILDLIFE PROTECTION

Bird Blocker

- Designed to be installed on Power Lines anywhere along the span or near the cross arm to prevent birds from landing or settling on the lines.
- Suits most cable sizes
- Will keep vertical orientation and face upwards.
- UV stabilised with good electrical insulation properties.
- Rubber stoppers used on either side of the Bird Blocker to fix in place on the line.
- Can install multiple Bird Blockers "in series" along the line. Where this is done, use rubber stoppers for every 10 Bird Blockers installed.

Item No.	Size	Base Material	Base Colour	Suits Cable Size
BB-BL	500x153mm	HDPE	Black	5mmØ-240mm ²
RS-BL	35x26mm	EPDM	Black	5mmØ-240mm ²

Parameter	Results (BB-B)		
Withstand voltage	15KV for 1 minute		
Heat resistance	No cracking or other damage at 60 degrees C		
Cold resistance	No cracking or other damage at 20 degrees C		
Crushing test	30N for 1 minute		

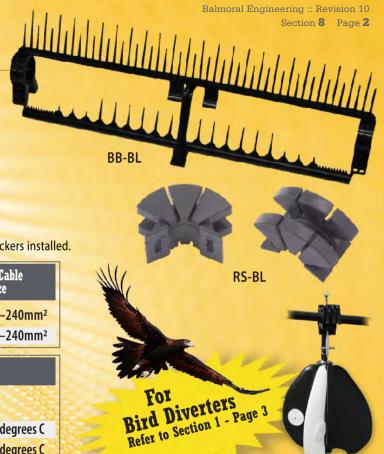



balmoral[®] engineering